

11/17/00

13c03 B.S. No.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

MPEP chapter 600 concerning utility patent application contents.

Attorney Docket No. 35.C14930

First Named Inventor or Application Identifier

SHINGO HAYAKAWA

Express Mail Label No.

Commissioner for Patents
Box Patent Application
Washington, DC 20231

ADDRESS TO:

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☐ Applicant claims small entity status
See 37 CFR 1.27.3. ☒ Specification Total Pages **71**4. ☒ Drawing(s) (35 USC 113) Total Sheets **15**5. ☐ Oath or Declaration Total Pages **1**a. ☐ Newly executed (original or copy)b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 6 below]i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).6. ☒ Application Data Sheet. See 37 CFR 1.767. ☐ CD-ROM or CD-R in duplicate, large table or Computer
Program (Appendix)8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies); orii. ☐ paperc. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney11. ☐ English Translation Document (if applicable)12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations13. ☐ Preliminary Amendment14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation☐ Divisional☐ Continuation-in-part (CIP)

of prior application No. ____/____

Prior application information:

Examiner _____

Group/Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label05514
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	41-20 =	21	X \$ 18.00 =	\$ 378.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	4-3 =	1	X \$ 80.00 =	\$ 80.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$270.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 710.00
			Total of above Calculations = \$ 1168.00		
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 1168.00

19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

- 20.
- ☒
- A check in the amount of \$ 1168.00 to cover the filing fee is enclosed.

- 21.
- ☐
- A check in the amount of \$ _____ to cover the recordal fee is enclosed.


22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Justin J. Oliver - Reg. No. 44,986

SIGNATURE



DATE

November 17, 2000

INVENTOR INFORMATION

Inventor One Given Name: Shingo
Family Name: HAYAKAWA
Postal Address Line One: 14-11, Utsukushigaoka Nishi 2-chome,
Postal Address Line Two: Aoba-ku
City of Residence: Yokohama-shi
State or Province of Residence: Kanagawa-ken
Country of Residence: Japan
Citizenship Country: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number: 05514
Fax: (212) 218-2200

APPLICATION INFORMATION

Title Line One: OPTICAL LOW-PASS FILTER, AND IMAGE SENSING UNIT
Title Line Two: AND APPARATUS USING THE SAME

Total Drawing Sheets: 15
Formal Drawings?: Yes
Application Type: Utility
Docket Number: 35.C14930
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One: 11-330178
Filing Date: 11-19-1999
Country: JAPAN
Priority Claimed: Yes

Foreign Application Two: 2000-150453
Filing Date: 05-22-2000
Country: JAPAN
Priority Claimed: Yes

OPTICAL LOW-PASS FILTER, AND IMAGE SENSING UNIT AND
APPARATUS USING THE SAME

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an optical low-pass filter and an optical apparatus (image sensing apparatus) using the same and, more particularly, to an optical low-pass filter suitable for a digital still camera, video camera, digital camera, and the like which use a solid-state image sensing element such as a CCD or the like.

Related Background Art

Since an image pick-up apparatus such as a digital still camera, video camera, or the like, which uses a two-dimensional solid-state image pick-up element such as a CCD, MOS, or the like, samples an object image at pixel pitches, when an object image having high spatial frequency components is to be sensed, a spurious resolution signal that outputs an aliasing image of high-frequency components as low-frequency components is generated, thus lowering the resolution of an object image. In an image pick-up apparatus which uses a single-plate color solid-state image sensing element as well, upon sensing an object image having high spatial frequency components, a false color signal determined by the layout of a color filter which is set in front

of pixels is generated, thus deteriorating the color reproducibility of an object image.

As a conventional means which is inserted in the optical path of an image sensing system to reduce the spurious resolution signal or spurious color signal resulting from high-frequency components of an object image, various optical low-pass filters have been proposed. As the most prevalent one of these optical low-pass filters, an optical low-pass filter which comprises a plane-parallel plate made of a quartz single crystal is known. In general, when the normal to an entrance surface is obliquely set to make a predetermined angle with the optic axis (Z-axis) of a crystal, rays that enter the plane-parallel plate made of quartz as a uniaxial crystal exhibit anisotropy in the Z-axis direction to be separated into ordinary and extraordinary rays, and separated rays parallelly leave the plane-parallel plate. At this time, the separation distance between the ordinary and extraordinary rays is determined by an angle the normal to the entrance surface of the plane-parallel plate makes with the Z-axis of the crystal, and the thickness of the plane-parallel plate.

Optical low-pass filters which utilizes such optical effects of quartz have been proposed in, e.g., Japanese Utility Model Publication Nos. 47-18688 and 47-18689, Japanese Patent Application Laid-Open

Nos. 59-75222 and 60-164719, and the like.

Japanese Utility Model Publication Nos. 47-18688 and 47-18689 disclose an arrangement which assumes a stripe-shaped filter as a color filter, and separates rays into ordinary and extraordinary rays using a plane-parallel plate made of, e.g., quartz having birefringence to image them on an image sensing surface so as to reduce a spurious color signal generated when the spatial frequency of an object is synchronized with the color filter. Especially, Japanese Utility Model Publication No. 47-18689 discloses an arrangement that cuts out a single crystal of quartz so that its optic axis (Z-axis) makes an angle of around 45° with the entrance and exit surfaces of the plane-parallel plate.

Japanese Patent Application Laid-Open Nos. 59-75222 and 60-164719 disclose an arrangement which assumes a Bayer-matrix filter shown in, e.g., Fig. 5 as a color filter, separates rays into ordinary and extraordinary rays by combining a plurality of birefringence plates to form a plurality of object images which are obtained by separating an object image and are offset by a predetermined pitch, and effectively reduces a spurious resolution signal and spurious color signal generated due to high-frequency components of an object.

An example that uses a single-crystal plate made of a material other than quartz as a birefringence

plate is disclosed in Japanese Patent Application
Laid-Open Nos. 9-211222, 11-218612, and the like.
Japanese Patent Application Laid-Open Nos. 9-211222 and
11-218612 have proposed an optical low-pass filter
5 which uses a plurality of birefringence plates, and
forms at least one of these plates using lithium
niobate. A single crystal of lithium niobate is a
uniaxial crystal like that of quartz but assures a
larger difference between the refractive indices of
10 ordinary and extraordinary rays than quartz. For this
reason, the thickness of the birefringence plate
required for obtaining a predetermined ray separation
distance can be decreased.

In the prior art that uses one or a combination of
15 a plurality of birefringence plates of quartz as an
optical low-pass filter, since the refractive index
difference between ordinary and extraordinary rays is
small, the thickness of each birefringence plate must
be larger than a given value to assure a predetermined
20 ray separation distance.

In general, when a plane-parallel plate of a
uniaxial crystal is prepared so the normal to its
entrance surface makes an angle θ with the optic axis
(Z-axis), and circularly polarized light
25 perpendicularly enters the plane-parallel plate, an
angle ϕ the traveling direction of ordinary rays makes
with that of extraordinary rays in the plane-parallel

plate is given by:

$$\tan\phi = (n_o^2 - n_e^2)\sin\theta\cos\theta/(n_e^2\cos 2\theta + n_o^2\sin 2\theta) \quad \dots(4)$$

where n_o is the refractive index of ordinary rays, and
 5 n_e is that of extraordinary rays.

Equation (4) represents the separation distance
 between ordinary and extraordinary rays per unit
 thickness of the birefringence plate, and this value is
 maximum when $\theta = 45^\circ$.

10 If the quartz single crystal has a refractive
 index $n_o = 1.544$ of ordinary rays and a refractive index
 $n_e = 1.533$ of extraordinary rays for d-lines, $\tan\phi =$
 -0.0058 when $\theta = 45^\circ$. Hence, when, for example, a
 solid-state image sensing element has a pixel pitch Ph
 15 $= 10 \mu m$ in the long-side direction, and extraordinary
 rays are offset $10 \mu m$ in this direction by a quartz
 birefringence plate to remove a spurious resolution
 signal generated in this direction, the quartz
 birefringence plate must have a thickness d of at least
 20 about 1.7 mm. In this manner, when quartz that assures
 a small refractive index difference between ordinary
 and extraordinary rays is used as the birefringence
 plate, the optical low-pass filter becomes thick, thus
 posing a problem in terms of space factor.

25 Furthermore, when a plane-parallel plate is
 inserted in the optical path of a photographing optical
 system, the following problems are posed in addition to

that of space factor.

Rays which are imaged by an ideal lens and pass through the plane-parallel plate are refracted at refraction angles according to the Snell's refraction law which is known to those who are skilled in the art in accordance with incident angles α into the plane-parallel plate, and leave the plane-parallel plate in a direction parallel to the incoming rays. The prospective focal plane of an ideal lens is determined by the paraxial theory that uses an approximation of $\sin \alpha \approx \alpha$ for the optical length in the plane-parallel plate, and is set at a position offset in the optical axis direction by an amount substituted by an air-converted optical path length d/N which is given using the plate thickness d and refractive index N of the plane-parallel plate. However, when the incident angle of rays that enter the plane-parallel plate increases, and the approximation of $\sin \alpha \approx \alpha$ deviates from the actual value, rays that emerge from the ideal lens cease to form an image on the prospective imaging surface. More specifically, too much spherical aberration occurs on the optical axis, and astigmatism which becomes too much on the meridional image surface with respect to the sagittal image surface is produced in an off-axis region.

Figs. 10A to 10C are explanatory views for explaining such phenomenon, i.e., ray aberrations which

occur in a birefringence plate when an ideal lens having an exit pupil of F2.0 is set at a position 50 mm separated from an ideal image surface, and a quartz birefringence plate made of a 5-mm thick plane-parallel plate having entrance and exit surfaces perpendicular to the optical axis is set at a position between the ideal lens and an ideal image surface. Fig. 10A illustrates an ideal lens 41 having a focal length = 50 mm, a 5-mm thick quartz birefringence plate 42, and a prospective focal plane 43 obtained by a paraxial calculation. Also, 10B and 10C respectively indicate neighbor regions of image surfaces having image heights of 0 mm and 20 mm.

Rays which are imaged by the ideal lens 41 and pass through the plane-parallel plate travel to form an image near the prospective focal plane 43, as shown in Fig. 10A. The neighbor regions 10B and 10C of that image plane are illustrated in an enlarged scale, as shown in Figs. 10B and 10C. That is, the best image surface position at an image height of 0 mm is located, as indicated by 46 in Fig. 10B, and that at an image height of 20 mm is located, as indicated by 47 in Fig. 10C. As a result, spherical aberration becomes too much at the center of the frame, and astigmatism which becomes too much on the meridional image surface is produced on the periphery of the frame.

In this manner, when the plane-parallel plate is

inserted between the photographing optical system and its prospective focal plane, the aforementioned ray aberrations are produced. Hence, it is a common practice to design the photographing optical system which must use a plane-parallel plate such as a quartz birefringence plate in consideration of aberrations produced by the plane-parallel plate. However, an image sensing apparatus with an exchangeable photographing optical system (e.g., a single-lens reflex type digital still camera) which can utilize exchangeable lens systems prepared for silver halide cameras as photographing optical systems cannot take such measure.

In a single crystal of lithium niobate as a uniaxial crystal like quartz, if the refractive index $n_o = 2.300$ of ordinary rays and the refractive index $n_e = 2.215$ of extraordinary rays with respect to d-lines, $\tan\phi = 0.0376$ when $\theta = 45^\circ$.

Assuming that the solid-state image sensing element has a pixel pitch $Ph = 10 \mu m$ along its long side direction as in the case of quartz, and a lithium niobate birefringence plate shifts extraordinary rays by $10 \mu m$ in this direction to remove a spurious resolution signal generated in that direction, since a lithium niobate single crystal has $\tan\phi \approx 0.0376$, the birefringence plate need only have a thickness d of about 0.27 mm . Compared to the aforementioned case

using the quartz single crystal, the thickness of the birefringence plate can be reduced to about 0.16 times, and when the lithium niobate birefringence plate is applied to an image sensing system as an optical
5 low-pass filter, a compact image sensing system can be realized while solving the problem of space factor, and the problem of ray aberrations produced by the plane-parallel plate can be alleviated.

Japanese Patent Application Laid-Open

10 Nos. 9-211222 and 11-218612 pay attention to such features of the lithium niobate single crystal.

Assuming that an image sensing apparatus uses a two-dimensional solid state image sensing element which has a pixel pitch = 10 μm and an aspect ratio = 2 : 3,
15 and has about 2.5 million effective pixels, the number of pixels in the horizontal direction is around 1,950, that in the vertical direction is around 1,300, and the dimensions of the effective pixels of the solid-state image sensing element are about 19.5 mm (horizontal
20 direction) \times 13.0 mm (vertical direction). If an optical low-pass filter made of a plane-parallel plate is relatively closely set in front of such solid-state image sensing element, the plane-parallel plate must have dimensions of at least about 21.0 mm (horizontal
25 direction) \times 14.5 mm (vertical direction) by adding an effective ray region that considers the solid angle of rays which enter the solid-state image sensing element,

and a region for holding the plane-parallel plate itself.

On the other hand, when extraordinary rays are to be separated by the pixel pitch = 10 μ m in the horizontal direction, if the angle θ the optic axis (Z-axis) of the lithium niobate single crystal makes with the normal to the entrance surface of the plane-parallel plate is set at 45°, the thickness of the plane-parallel plate is about 0.27 mm, as described above. As disclosed in Japanese Utility Model Publication No. 47-18688, when a plane-parallel plate that separates extraordinary rays in a direction which makes an angle of about 45° with the horizontal line of the frame in consideration of removal of the influence of a spurious signal due to frequency components 1/2 the pixel pitch is used together, the thickness of this plane-parallel plate is around 0.19 mm. Since the thicknesses of these plane-parallel plates are substantially 1% or less of the diagonal length determined by the aforementioned outer dimensions, these plates easily crack due to insufficient mechanical strength.

Japanese Patent Application Laid-Open Nos. 9-211222 and 11-218612 mentioned above proposed arrangements of optical low-pass filters in which lithium niobate and quartz are adhered. These prior arts can reduce the thickness of the optical low-pass

filter compared to that which is made of quartz alone, but the aforementioned problems of space factor and optical performance of the photographing optical system remain unsolved.

5 A low-pass filter of the present invention assumes use in, e.g., a digital camera, video camera, and the like, and is especially suitable for a single-lens reflex type digital camera which can effectively utilize various exchangeable lenses prepared as those
10 to be mounted on a single-lens reflex camera that uses a silver halide film. For this purpose, when the low-pass filter is designed to have a sufficiently low profile for use in the single-lens reflex type digital camera main body, it must prevent excessive drop of the
15 resolving powers of the exchangeable lenses and must not cause any ghost or flare when it is used in an image sensing system.

Each exchangeable lens for a single-lens reflex camera that uses a silver halide film is designed to
20 assure spaces for a pivotal mirror and a focal plane shutter so as to realize a TTL finder free from any parallax by maintaining a sufficiently large distance (back focus) from the lens surface on the most image side to the focal plane.

25 In order to realize a single-lens reflex type digital camera that uses a solid-state image sensing element in place of a silver halide film, the image

sensing surface of the solid-state image sensing element can be set at a position equivalent to that of the silver halide film. However, as disclosed in the first prior art, when an optical low-pass filter that
5 uses a plurality of quartz birefringence plates is arranged in the camera, it unwantedly interferes with the pivotal mirror and focal plane shutter.

On the other hand, an exchangeable lens for a single-lens reflex camera that uses a silver halide
10 film normally does not assume the presence of any reflecting member between the lens surface on the most image side and the focal plane. That is, when an optical member having a predetermined reflectance or higher with respect to the visible wavelength range is
15 inserted between the photographing optical system and its focal panel, it tends to produce harmful rays such as surface-reflected ghost, flare spot, and the like that decrease the contrast of an object image. Hence, the reflectance of the optical low-pass filter in the
20 visible wavelength range must be sufficiently low.

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide an optical low-pass filter which
25 has sufficiently high mechanical strength and high optical performance, and does not cause any ghost, flare spot, or the like when it is used in a

single-lens reflex type camera.

According to one aspect of the invention, there is provided an optical low-pass filter which comprises at least one birefringence plate which is made of a uniaxial single crystal that causes birefringence of incoming rays and has a refractive index difference of 0.02 or more for ordinary and extraordinary rays, and the filter satisfies at least one of:

$$10^{\circ} < \theta < 27^{\circ} \quad \dots(1)$$

$$61^{\circ} < \theta < 80^{\circ} \quad \dots(2)$$

where θ is the angle an optic axis of said at least one birefringence plate makes with a normal to a surface of said at least one birefringence plate.

According to further aspect of the invention, said at least one birefringence plate is made of lithium niobate.

According to further aspect of the invention, the filter has a plurality of plane-parallel plates including said at least one birefringence plate, and when the plurality of plane-parallel plates are adhered, a dielectric thin film having an anti-reflection effect of rays in a visible wavelength range at an interface between an adhesive and the birefringence plate is added to the surface of the birefringence plate.

According to further aspect of the invention, the filter comprises a first birefringence plate made of a

uniaxial single crystal and a second birefringence plate made of a uniaxial single crystal, and an orthogonal projection of an optic axis of the first birefringence plate onto an entrance or exit surface
5 and an orthogonal projection of an optic axis of the second birefringence plate onto the entrance or exit surface point to different directions.

According to further aspect of the invention, the orthogonal projection of the optic axis of the first
10 birefringence plate onto the entrance or exit surface and the orthogonal projection of the optic axis of the second birefringence plate onto the entrance or exit surface make substantially 45° .

According to further aspect of the invention,
15 the filter comprises a first birefringence plate made of a uniaxial single crystal, a second birefringence plate made of a uniaxial single crystal and a third birefringence plate made of a uniaxial single crystal, and directions of orthogonal projections of optic axes
20 of the first, second, and third birefringence plates onto an entrance or exit surface are different from each other.

According to further aspect of the invention, the orthogonal projection of the optic axis of the first
25 birefringence plate onto the entrance or exit surface and the orthogonal projection of the optic axis of the second birefringence plate onto the entrance or exit

surface make substantially 45° , and the orthogonal projection of the optic axis of the first birefringence plate onto the entrance or exit surface and an orthogonal projection of an optic axis of the third
5 birefringence plate onto the entrance or exit surface make substantially 90° .

According to further aspect of the invention, the first, second, and third birefringence plates are arranged in turn from a light entrance side, and the
10 filter satisfies:

$$D1 \approx D3 > D2$$

where $D1$, $D2$, and $D3$ are respectively the separation distances of the first, second, and third birefringence plates at exit surfaces thereof.

15 According to further aspect of the invention, the filter satisfies one of:

$$10^\circ < \theta_2 < 27^\circ$$

$$61^\circ < \theta_2 < 80^\circ$$

where θ_2 is the angle the optic axis of the second
20 birefringence plate makes with a normal to an entrance or exit surface of a plane-parallel plate.

According to another aspect of the invention, there is provided an image sensing unit comprising an image sensing element, and an optical low-pass filter
25 set out in the foregoing, and the filter is inserted in an optical path of photographing light guided to the image sensing element, and the filter causes

birefringence of the photographing light.

According to further aspect of the invention, the image sensing element and the optical low-pass filter are integrated.

5 According to further aspect of the invention, the optical low-pass filter unit are adhered to a front surface of a package that encapsulates the image sensing element.

10 According to further aspect of the invention, the optical low-pass filter is adhered to a front surface of a board on which the image sensing element is mounted and encapsulates the image sensing element.

15 According to further aspect of the invention, the optical low-pass filter is directly adhered to the image sensing element.

20 According to further aspect of the invention, the image sensing unit comprises a first birefringence plate made of a uniaxial single crystal, a second birefringence plate made of a uniaxial single crystal, and the image sensing element has a rectangular image sensing surface, and an orthogonal projection of an optic axis of the first birefringence plate onto an entrance or exit surface is substantially parallel to a long side of the image sensing surface, and an
25 orthogonal projection of an optic axis of the second birefringence plate makes substantially 45° with the long side of the image sensing surface.

According to further aspect of the invention, the image sensing unit comprises a first birefringence plate made of a uniaxial single crystal, a second birefringence plate made of a uniaxial single crystal and a third birefringence plate made of a uniaxial single crystal, and the image sensing element has a rectangular image sensing surface, and an orthogonal projection of an optic axis of the first birefringence plate onto an entrance or exit surface makes substantially 45° with a long side of the image sensing surface, an orthogonal projection of an optic axis of the second birefringence plate onto the entrance or exit surface makes substantially 45° with the orthogonal projection of the optic axis of the first birefringence plate onto the entrance or exit surface, and an orthogonal projection of an optic axis of the third birefringence plate onto the entrance or exit surface makes substantially 90° with the orthogonal projection of the optic axis of the first birefringence plate onto the entrance or exit surface.

According to further aspect of the invention, the image sensing element has a rectangular image sensing surface, and the image sensing unit satisfies:

$$0.015 < p/d < 0.045 \quad \dots(3)$$

where d is the thickness of the at least one birefringence plate, and p is the pixel pitch of the image sensing surface in a long side direction.

According to another aspect of the invention, there is provided an image sensing apparatus which comprises an image sensing unit set out in the foregoing and an image sensing optical system for
5 guiding photographing light to the image sensing unit.

According to further aspect of the invention, the image sensing apparatus further comprises a detachable mount.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a view for explaining the relationship between the angle the optic axis of a lithium niobate single crystal makes with the normal to the entrance and exit surfaces of the plane-parallel plate, and the
15 separation distance between ordinary and extraordinary rays;

Fig. 2 is a schematic sectional view of an image sensing system when an optical low-pass filter according to the first embodiment of the present
20 invention is mounted in a single-lens reflex camera;

Figs. 3A, 3B, 3C, 3D and 3E are explanatory views of the optical low-pass filter of the first embodiment;

Fig. 4 is an explanatory view showing the separation process of an object image by ordinary and
25 extraordinary rays;

Fig. 5 is an explanatory view of a color filter matrix used on an image sensing element;

Figs. 6A and 6B are explanatory views showing the spatial frequency characteristics of the optical low-pass filter of the first embodiment;

5 Figs. 7A, 7B, 7C, 7D and 7E are explanatory views of an optical low-pass filter according to the second embodiment of the present invention;

Fig. 8 is an explanatory view of an image sensing unit which comprises an optical low-pass filter as a protection plate;

10 Fig. 9 is an explanatory view of another image sensing unit which comprises an optical low-pass filter as a protection plate;

Figs. 10A, 10B and 10C are explanatory views of ray aberrations produced in a plane-parallel plate;

15 Fig. 11 is a schematic sectional view of an image sensing system when an optical low-pass filter according to the third embodiment of the present invention is mounted in a single-lens reflex camera;

Figs. 12A, 12B, 12C, 12D, 12E, 12F and 12G are
20 explanatory views of the optical low-pass filter according to the third embodiment of the present invention;

Fig. 13 is an explanatory view of an object image separated by the optical low-pass filter according to
25 the third embodiment of the present invention;

Figs. 14A, 14B and 14C are explanatory views of the spatial frequency characteristics of the optical

low-pass filter of the present invention;

Figs. 15A, 15B and 15C are explanatory views of the spectral characteristics of the optical low-pass filter of the present invention; and

5 Figs. 16A, 16B, 16C, 16D, 16E, 16F and 16G are explanatory views of an optical low-pass filter according to the fourth embodiment of the present invention.

10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An outline of an embodiment of the present invention will be explained below.

An optical low-pass filter of this embodiment is comprised of a birefringence plate inserted in an
15 optical path between a solid-state image sensing element such as a CCD, MOS, or the like, and a photographing optical system. The birefringence plate is made of a uniaxial single crystal such as lithium niobate having a larger refractive index difference
20 between ordinary and extraordinary rays than quartz, and the filter of this embodiment satisfies at least one of:

$$10^{\circ} < \theta < 27^{\circ} \quad \dots(1)$$

$$61^{\circ} < \theta < 80^{\circ} \quad \dots(2)$$

25 where θ is the angle the optic axis (Z-axis) of the crystal makes with the normal to the entrance surface of the birefringence plate.

In this embodiment, by appropriately setting the angle the Z-axis of the uniaxial single crystal which forms the birefringence plate makes with the normal to the entrance surface, a plane-parallel plate serving as the birefringence plate can have an appropriate thickness that allows machine works without posing any problem, and can assure a sufficiently high mechanical strength. Since the birefringence plate can be thinner than that using quartz, space efficiency can be made high, and ray aberrations produced due to insertion of the plane-parallel plate can be sufficiently reduced. Hence, an optical low-pass filter which is particularly suitably used for an image sensing apparatus that uses exchangeable lenses prepared for a silver halide camera as photographing optical systems can be realized.

Conditional formulas (1) and (2) numerically describe features of the arrangement of the optical low-pass filter of the present invention, and express optical setting ranges of the angle θ the Z-axis of the uniaxial single crystal such as lithium niobate which has a larger refractive index difference between ordinary and extraordinary rays than quartz makes with the normal to the entrance surface of the birefringence plate. The ranges specified by formulas (1) and (2) correspond to hatched regions shown in Fig. 1 that shows the relation of equation (4) mentioned above, which expresses the separation distance between

ordinary and extraordinary rays per unit thickness of the birefringence plate. When an angle that satisfies conditional formula (1) or (2) is set, the birefringence plate can become 1.2 to 3 times thicker than that when $\theta = 45^\circ$.

When the value θ becomes close to 45° beyond the upper limit value of conditional formula (1) or the lower limit value of conditional formula (2), a practical difference from that set at $\theta = 45^\circ$ decreases, and the thickness of the birefringence plate becomes too small, resulting in insufficient mechanical strength. Conversely, when the value θ becomes close to 0° beyond the lower limit value of conditional formula (1) or to 90° beyond the upper limit value of conditional formula (2), a change in separation angle of rays with respect to a change in angle the Z-axis of the single crystal makes with the normal to the entrance surface of the plane-parallel plate becomes large, and it is hard to stably work the plane-parallel plate as a birefringence plate that can obtain a desired separation distance.

When the plane-parallel plate is formed of lithium niobate so that the value θ indicates an angle which satisfies the ranges specified by conditional formulas (1) and (2), e.g., when $\theta = 70^\circ$, the separation distance between ordinary and extraordinary rays by this plane-parallel plate is 0.0235 mm per mm of the

plane-parallel plate. Therefore, the thickness of the plane-parallel plate required for obtaining a separation distance of 10 μm is around 0.43 mm. This thickness is around 1.6 times larger than that obtained
5 when $\theta = 45^\circ$, and problems of mechanical strength and machine works can be solved. Compared to the case using quartz with $\theta = 45^\circ$, since the plane-parallel plate is about 0.25 times, i.e., has a sufficiently small thickness, the adverse influences on optical
10 performance upon inserting the optical low-pass filter into the optical path can be minimized.

Note that the optical low-pass filter is inserted in the optical path between a photographing optical system 1 and an image sensing element 3, and is formed
15 to have a plane-parallel plate shape by adhering a combination of a plurality of birefringence plates so that their optic axes point to different directions.

The reason why a combination of birefringence plates are adhered so that their optic axes point to different directions is that a plane-parallel plate, which is made of lithium niobate (uniaxial crystal) used as a material of each birefringence plate in this embodiment, is not easy to handle as a single plate since it readily cleaves in a predetermined direction
20 due to a nature of the single crystal. Hence, when a plurality of birefringence plates are adhered so that the optic axes of the single crystals point to
25

different directions, and especially, orthogonal projections of the optic axes of the single crystals onto the entrance surface point to different directions, they become less susceptible to cracking, thus allowing easy handling.

In this case, the orthogonal projections of the optic axes of the single crystals onto the entrance surface agree with the separation direction of extraordinary rays, and it is desirable to appropriately reduce a spurious resolution signal and spurious color signal generated by sampling of the solid-state image sensing element at pixel pitches in both the horizontal and vertical directions, exploiting the separation of rays. For example, in a most prevalent two-dimensional solid-state image sensing element in which pixels each having a nearly square aperture line up at substantially the same pitches in the horizontal and vertical directions, spurious signals generated by high-frequency components in the horizontal, vertical, and oblique 45° directions readily stand out. For this reason, the plurality of birefringence plates preferably include two. birefringence plates, i.e., a first birefringence plate in which the orthogonal projection of the Z-axis of the single crystal onto the entrance surface points to the long side direction of the solid-state image sensing element, and a second birefringence plate in which the

orthogonal projection of the Z-axis of the single crystal onto the entrance surface makes 45° with the long side direction of the solid-state image sensing element.

5 When each of the birefringence plates of the optical low-pass filter, which have separation effects of an object image in predetermined directions, is formed of a lithium niobate single crystal, since the optical low-pass filter can be a sufficiently thin
10 plane-parallel plate within an allowable work range, it can be equipped in a single-lens reflex digital camera main body, and allows use of exchangeable lenses prepared for a silver halide camera without impairing their optical performance.

15 As described above, in a solid-state image sensing element such as a CCD used in, e.g., a digital camera, it is a common practice to regularly line up individual pixels two-dimensionally, i.e., in the horizontal and vertical directions and, hence, spurious signals
20 generated upon sampling conspicuously appear in these line-up directions. Also, when the horizontal and vertical pitches of the individual pixels are nearly equal to each other, apparent periodicity of pixels is observed in a direction that substantially makes 45°
25 with these two directions, and the resolving power of a predetermined frequency must be lowered in this direction.

Of course, in a special case, i.e., when the individual pixels have considerably different horizontal and vertical pitches, periodicity in the oblique direction is generated at another angle. For this reason, in order to efficiently reduce spurious signals generated when an object having periodicity in these directions in the photographing frame upon using a general solid-state image sensing element, the optical low-pass filter preferably has the aforementioned arrangement.

With this arrangement, the intensity ratio of ordinary rays to extraordinary rays separated by a single birefringence plate becomes 1 : 1, and the effect of the optical low-pass filter obtained when a stack of a plurality of birefringence plates is used can be uniformed on the entire frame, thus easily realizing a preferable optical low-pass filter.

Assuming that such general solid-state image sensing element is used, a plane-parallel plate obtained by adhering three birefringence plates each made of a lithium niobate single crystal is more preferably used as an optical low-pass filter. When this optical low-pass filter is applied to an optical apparatus, it is inserted in the optical path between a photographing optical system and an image sensing element, and the birefringence plates made of the lithium niobate single crystal are obtained by

combining a first birefringence plate in which the orthogonal projection of the optic axis onto the entrance or exit surface of the plane-parallel plate substantially makes an angle of 45° with the long side direction of the image sensing element, a second birefringence plate in which the orthogonal projection of the optic axis onto the entrance or exit surface of the plane-parallel plate substantially makes an angle of 45° with the orthogonal projection of the first birefringence plate, and a third birefringence plate in which the orthogonal projection of the optic axis onto the entrance or exit surface of the plane-parallel plate substantially makes an angle of 90° with the orthogonal projection of the first birefringence plate in the order named.

In this embodiment, if D1, D2, and D3 respectively represent the separation distances between ordinary and extraordinary rays on the exit surfaces of the first, second, and third birefringence plates, a low-profile optical filter is prepared to satisfy:

$$D1 \approx D3 > D2 \quad \dots(5)$$

and an image sensing apparatus which reduces spurious signals in combination with a low-pass filter implemented by a signal process is constructed.

Conditional formula (5) indicates an arrangement in which the separation distances of an object image in two directions that make 45° with the long side

direction of the image sensing element are set to be nearly equal to each other (with the range of $\pm 20\%$), and are set to be larger than the separation distance in the long side direction. As described above, in a
5 single-plate solid-state image sensing element having a general color filter matrix shown in Fig. 5, conspicuous spurious luminance and color signals are generated at a spatial frequency corresponding to the pixel pitch in the long side and short side directions
10 of the image sensing element, and a conspicuous spurious color signal is generated at a spatial frequency corresponding to $1/\sqrt{2}$ that pixel pitch.

The optical low-pass filter with the arrangement which satisfies conditional formula (5) is arranged to
15 reduce a spurious color signal in the oblique direction of these spurious signals, and spurious color signals are reduced by a low-pass filter implemented by a signal process. In this case, it is rather difficult to reduce a spurious luminance signal at a specific
20 spatial frequency in the long side and short side directions of the image sensing element, but an object image can be sensed by fully exploiting the resolving power performance of the photographing optical system. At this time, the second birefringence plate that
25 separates ordinary and extraordinary rays in the long side direction of the image sensing element essentially serves as a phase plate which rotates the phase of rays

emanating from this birefringence plate, and as a means for implementing separation of ordinary and extraordinary rays by the third birefringence plate.

At this time, the separation distances D1 and D3
5 between ordinary and extraordinary rays by the first and second birefringence plates are preferably set to satisfy:

$$D1 = D3 = P/\sqrt{2}$$

where P is the pixel pitch. The separation distance D2
10 between ordinary and extraordinary rays by the second birefringence plate is preferably set to satisfy:

$$D2 \leq P/2$$

Note that substantially equal means within $\pm 20\%$.

However, in practice, it is a common practice to
15 set the separation distances D1 and D3 to be slightly smaller than $P/\sqrt{2}$ upon relative comparison between the resolving power drop of a photographed image and the reduction effect of spurious signals, and D2 should be set in consideration of difficulty of machine work and
20 the like.

Since the second birefringence plate essentially serves as a phase plate by decreasing its separation distance with respect to the first and third birefringence plates so as to satisfy conditional
25 formula (5), as described above, it need only have a manufacturable thickness, and an effect of converting the direction of polarization.

Also, the optical low-pass filter of this embodiment can also be used as a protection plate of the image sensing element. For example, in a solid-state image sensing element which constructs an image sensing unit by encapsulating its image sensing portion in a package, the image sensing portion can be protected by adhering the optical low-pass filter of this embodiment to the front surface of the package. On the other hand, in a solid-state image sensing element which constructs a solid-state image sensing unit by bonding an image sensing portion on a board, the optical low-pass filter of this embodiment is bonded to the front surface of the board on which the image sensing portion is mounted using its outer circumferential portion to encapsulate and protect the image sensing portion.

In an image sensing apparatus that uses a solid-state image sensing element, an infrared cut filter is normally inserted in the optical path for the purpose of correcting the difference between spectral sensitivity of the image sensing element and visual sensitivity. Hence, when a dichroic filter which is made of a multilayered dielectric film and reflects light in the infrared wavelength range is used together in place of a color glass filter that absorbs light in the infrared wavelength range, the need for a glass plate as an infrared cut filter can be obviated, and a

size reduction can be achieved. At this time, it is more effective for a size reduction of the system to deposit the multilayered dielectric film on at least one surface of the birefringence plate of a lithium niobate single crystal.

In the image sensing apparatus of this embodiment, the optical low-pass filter includes a birefringence plate which has an effect of separating an object image in the long side direction of the two-dimensional solid-state image sensing element, and satisfies:

$$0.015 < p/d < 0.045 \quad \dots(3)$$

where d is the thickness of the birefringence plate, and p is the pixel pitch of the solid-state image sensing element in its long side direction.

Conditional formula (3) specifies the relationship between the pixel pitch in the horizontal direction which becomes a cause of generation of a spurious resolution signal and a spurious color signal, and the thickness of the birefringence plate of the uniaxial crystal, which has an effect of separating rays in the horizontal direction. If the arrangement satisfies conditional formula (3), the ratio of the outer dimensions and thickness of the birefringence plate is appropriately set in practice under an assumption of a solid-state image sensing element having a predetermined number of pixels, the problem related to machine work can be solved easily, and the problem

related to handling can be reduced.

Upon adhering the plurality of birefringence plates of the lithium niobate single crystals to each other, when a dielectric thin film having an anti-reflection effect of rays in the visible wavelength range at the interface of an adhesive and the birefringence plate is added, a preferred embodiment in terms of a reduction of ghost and flare can be realized.

This is because the refractive index of ordinary rays of the lithium niobate single crystal for d-lines is $n_o = 2.300$, which is higher than those of quartz and optical glass and, hence, the reflectance at the interface tends to be high. For this reason, if the surface of the single crystal is exposed, reflected light may considerably impair image quality as flare. For example, optical glass having a refractive index of around 1.6 exhibits a reflectance of around 5.3% at an interface with air, and exhibits a reflectance of around 1.0% at an interface with an adhesive having a refractive index of around 1.5. By contrast, the lithium niobate exhibits a reflectance of around 15.5% at an interface with air, and a reflectance of around 4.4% at an interface with an adhesive having a refractive index of around 1.5.

In this manner, since the lithium niobate single crystal has a reflectance of rays in the visible

wavelength range, if it is inserted in the optical path without adding any anti-reflection film (e.g., a dielectric thin film), it produces ghost and flare, resulting in a contrast drop of a photographed image.

5 For this reason, an anti-reflection treatment is preferably done at an interface with air.

When the lithium niobate single crystals are adhered to each other, if the refractive index of an adhesive is set to be substantially equal to that of
10 the lithium niobate single crystal, the reflectance at the interface with the adhesive can be decreased. However, no transparent adhesive with such high refractive index is available currently.

Hence, in a preferred embodiment of the optical
15 low-pass filter that uses the lithium niobate single crystal, upon adhering the plurality of birefringence plates, an anti-reflection film is preferably added to the interface with an adhesive. In this case, the anti-reflection film preferably uses a dielectric which
20 has an intermediate refractive index between those of the lithium niobate single crystal and adhesive by setting its optical film thickness to be $1/4$ the center wavelength of the visible wavelength range. If no dielectric thin film material having an appropriate
25 refractive index is available, an anti-reflection film multilayer in which individual optical film thicknesses are appropriately set is preferably added.

In this manner, an optical low pass filter, which is inserted between a photographing optical system and solid-state image sensing element for the purpose of reductions of any spurious resolution signal and spurious color signal produced due to high-frequency components of an object image in an image sensing apparatus which uses a two-dimensional solid-state image sensing element such as a CCD, MOS, or the like, is prepared by adhering birefringence plates, each of which has an appropriate thickness and is made of a lithium niobate single crystal, to each other, thus realizing a preferred optical low-pass filter. Especially, a single-lens reflex digital still camera which can satisfactorily use exchangeable lens systems for a silver halide camera is realized.

Practical embodiments of an image sensing apparatus to which an optical low-pass filter of the present invention is applied will be explained below. An image sensing element 3 which is commonly used in image sensing apparatuses in all embodiments is a solid-state image sensing element in which each pixel has a $10\text{-}\mu\text{m}^2$ square shape, has a color filter matrix defined by a repetitive pattern shown in Fig. 5 in front of pixels, and uses 1,950 pixels in the horizontal direction and 1,300 pixels in the vertical direction, thus constructing a two-dimensional color solid-state image sensing element having 2.5 million

effective pixels or more. In Fig. 5, G, B, and R respectively indicate color filters which transmit green, blue, and red light components.

(First Embodiment)

5 Fig. 2 is a schematic sectional view of an image sensing system when an optical low-pass filter of this embodiment is mounted in a single-lens reflex digital still camera. In Fig. 2, an exchangeable photographing lens (photographing optical system) 1 has a mount which
10 is commonized so that exchangeable lenses for a silver halide camera can be used. An optical low-pass filter 2 is made of a plane-parallel plate obtained by adhering two birefringence plates (21 and 22 in Fig. 2) formed of a lithium niobate single crystal. In the
15 camera of this embodiment, the optical low-pass filter 2 is inserted immediately before a solid-state image sensing element 3, and separates an object image into four images by the effect of the two birefringence plates 21 and 22.

20 Figs. 3A to 3E are explanatory views of the birefringence plates 21 and 22 which are made of a lithium niobate single crystal, and form the optical low-pass filter 2 of this embodiment shown in Fig. 2. The optical low-pass filter 2 of this embodiment is
25 formed by adhering the two birefringence plates 21 and 22 made of a lithium niobate single crystal. Fig. 3A shows the optical low-pass filter 2 viewed from the

optical axis direction of the photographing lens 1, and
z1a and z2a respectively represent orthogonal
projections of the optic axes (Z-axes) of the
birefringence plates 21 and 22. As shown in Fig. 3A,
5 the orthogonal projection z1a of the Z-axis of the
birefringence plate 21 agrees with (parallel to) the
long side direction of the optical low-pass filter 2,
and the orthogonal projection z2a of the Z-axis of the
birefringence plate 22 makes an angle $\phi 2$ with the long
10 side of the optical low-pass filter 2. In this
embodiment, $\phi 2 = 45^\circ$.

The size of the optical low-pass filter 2 is
determined in consideration of the solid angle of rays
coming from the photographing lens 1 and a holder for
15 the optical low-pass filter 2 itself in addition to the
dimensions of the effective pixel region of the image
sensing element 3. In this embodiment, the optical
low-pass filter 2 has a size larger than the effective
pixel region of the image sensing element 3. The long
20 side direction of the optical low-pass filter 2
substantially agrees with that of the image sensing
element.

Fig. 3B shows the optical low-pass filter 2 of
this embodiment viewed from a "3B" view direction in
25 Fig. 3A, and Fig. 3C is a partially enlarged view of
Fig. 3B. In Figs. 3B and 3C, z1 represents the Z-axis
of the birefringence plate 21, and the Z-axis z1 of the

birefringence plate 21 and the normal to the entrance/exit surface of the optical low-pass filter make an angle θ_1 , as shown in Fig. 3C. In this embodiment, $\theta_1 = 75^\circ$. Fig. 3D shows the optical
5 low-pass filter 2 of this embodiment viewed from a "3D" view direction in Fig. 3A, and Fig. 3E is a partially enlarged view of Fig. 3D. In Figs. 3D and 3E, z_2 represents the Z-axis of the birefringence plate 22, and the Z-axis z_2 of the birefringence plate 22 and the
10 normal to the entrance/exit surface of the optical low-pass filter make an angle θ_2 , as shown in Fig. 3E. In this embodiment, $\theta_2 = 75^\circ$. Furthermore, thicknesses d_1 and d_2 of the birefringence plates 21 and 22 are respectively $d_1 = 0.45$ mm and $d_2 = 0.30$ mm.

15 In this embodiment, since the birefringence plates 21 and 22 are arranged in this manner, extraordinary rays are imaged to be offset from ordinary rays by around $10\text{ }\mu\text{m}$ in the horizontal direction (long side direction) and around $7\text{ }\mu\text{m}$ in the oblique 45° direction
20 with respect to the horizontal direction, thus separating an object image into four images. Fig. 4 shows the separation process of the object image. In Fig. 4, p indicates the pixel pitch of the image sensing element 3 in the long side direction
25 (horizontal direction).

In this embodiment, the relationship between the thickness d of the birefringence plate 21 which has an

effect of separating an object image in the long side direction of the solid-state image sensing element 3, and the pixel pitch p of the solid-state image sensing element 3 in the long side direction is given by:

5 $p/d = 0.022$

and satisfies conditional formula (3) mentioned above.

In a solid-state image sensing element in which square pixels having color filters shown in Fig. 5 are two-dimensionally arranged, it is known that moiré is
10 generated in an object image having a spatial frequency n/p (n is an integer) and a spurious color signal is generated in an object image having a spatial frequency $(2n-1)/2p$ in the line-up directions of pixels, i.e., in the horizontal and vertical directions. Also, since
15 pixels have periodicity in the oblique 45° direction, it is known that a spurious color signal is generated in an object image having a spatial frequency $(2n-1)/\sqrt{2}p$. For this reason, an optical low-pass filter which controls MTF values at least at these
20 spatial frequencies to be low is required.

In the optical low-pass filter of this embodiment, in order to efficiently reduce a spurious resolution signal and spurious color signal generated based on the color filter matrix shown in Fig. 5 and the sampling
25 pitch p of pixels, the birefringence plate 21 separates extraordinary rays by p in the horizontal direction, and the birefringence plate 22 separates extraordinary

rays by $p/\sqrt{2}$ in the oblique 45° direction, thus separating the object image into four images, as shown in Fig. 4. Since this embodiment assumes an image sensing element having a pixel pitch = $10\text{ }\mu\text{m}$, the
5 birefringence plate 21 separates an image by around $10\text{ }\mu\text{m}$, which is the same as the pixel pitch, in the horizontal direction to mainly reduce the moiré, and the birefringence plate 22 separates an image by an amount nearly half (about $7\text{ }\mu\text{m}$) the pixel pitch in the
10 oblique 45° direction to mainly reduce the spurious color signal.

In this embodiment, since the two birefringence plates 21 and 22 are used, an optical low-pass filter which suppresses MTF values of high spatial frequencies
15 equal to or higher than a cutoff frequency = $1/2p$ determined by the pixel pitch p to reduce generation of any spurious resolution signal and spurious color signal is efficiently formed.

Figs. 6A and 6B show the spatial frequency
20 characteristics of the optical low-pass filter of this embodiment. Figs. 6A and 6B respectively shows the characteristics in the horizontal direction (the long side direction of the image sensing element) and in the vertical direction (the short side direction of the
25 image sensing element).
(Second Embodiment)

Figs. 7A to 7E are explanatory views of

birefringence plates 121 and 122 which are made of a lithium niobate single crystal, and form an optical low-pass filter 102 of the second embodiment. The optical low-pass filter 102 of this embodiment is inserted in the optical path between the photographing lens 1 and solid-state image sensing element 3 as in the image sensing system shown in Fig. 1 when it is used, and is functionally equivalent to the optical low-pass filter 2 of the first embodiment. Differences from the optical low-pass filter 2 of the first embodiment will be explained below.

Fig. 7A shows the optical low-pass filter 102 viewed from the optical axis direction of the photographing lens 1, and z1a and z2a respectively represent orthogonal projections of the optic axes (Z-axes) of the birefringence plates 121 and 122. As shown in Fig. 7A, in this embodiment the orthogonal projection z1a of the Z-axis of the birefringence plate 121 agrees with (parallel to) the long side direction of the optical low-pass filter 102, and the orthogonal projection z2a of the Z-axis of the birefringence plate 122 makes an angle ϕ_2 with the long side of the optical low-pass filter 102. In this embodiment as well, $\phi_2 = 45^\circ$.

In this embodiment, the size of the optical low-pass filter 102 is larger than the effective pixel region of the image sensing element 3 as in the optical

low-pass filter 2 of the first embodiment. Note that the long side direction of the optical low-pass filter 102 substantially agrees with that of the image sensing element.

5 Fig. 7B shows the optical low-pass filter 102 of this embodiment viewed from a "7B" view direction in Fig. 7A, and Fig. 7C is a partially enlarged view of Fig. 7B. In Figs. 7B and 7C, z_1 represents the Z-axis of the birefringence plate 121, and the Z-axis z_1 of the birefringence plate 121 and the normal to the
10 entrance/exit surface of the optical low-pass filter 102 make an angle θ_1 , as shown in Fig. 7C. In this embodiment, $\theta_1 = 15^\circ$. Fig. 7D shows the optical low-pass filter 102 of this embodiment viewed from a
15 "7D" view direction in Fig. 7A, and Fig. 7E is a partially enlarged view of Fig. 7D. In Figs. 7D and 7E, z_2 represents the Z-axis of the birefringence plate 122, and the Z-axis z_2 of the birefringence plate 122 and the normal to the entrance/exit surface of the
20 optical low-pass filter 102 make an angle θ_2 , as shown in Fig. 7E. In this embodiment, $\theta_2 = 35^\circ$. Furthermore, thicknesses d_1 and d_2 of the birefringence plates 121 and 122 are respectively $d_1 = 0.30$ mm and $d_2 = 0.30$ mm.

25 In the optical low-pass filter 102 of this embodiment, since the birefringence plates 121 and 122 are arranged in this manner, extraordinary rays are

imaged to be offset from ordinary rays by around $10\text{ }\mu\text{m}$ in the horizontal direction and around $7\text{ }\mu\text{m}$ in the oblique 45° direction, thus separating an object image into four images.

5 In this embodiment, the angle θ the Z-axis of the lithium niobate single crystal that forms the birefringence plate makes with the normal to the entrance/exit surface of the optical low-pass filter is different from that in the first embodiment. By
10 appropriately setting the angle θ within the range in which conditional formula (1) or (2) holds, a sufficiently low-profile optical low-pass filter which can overcome the problems related to machine work and handling can be realized as in the first embodiment.
15 (Third Embodiment)

Fig. 11 is a schematic view showing principal part of an optical apparatus having an optical low-pass filter of the third embodiment. This embodiment exemplifies an image sensing apparatus which mounts the
20 optical low-pass filter. In Fig. 11, a photographing lens (photographing optical system) 1 has a mount which is commonized so that exchangeable lenses for a silver halide camera can be used. An optical low-pass filter 5 is made of a plane-parallel plate obtained by
25 adhering a plurality of (three in this embodiment) birefringence plates (51, 52, and 53 in Fig. 11) formed of a lithium niobate single crystal. In the camera of

this embodiment, the optical low-pass filter 5 is inserted immediately before a solid-state image sensing element 3, and separates an object image into eight images by the effect of the three birefringence plates 51, 52, and 53.

Figs. 12A to 12G are explanatory views of the three birefringence plates 51, 52, and 53 which are made of a lithium niobate single crystal and form the optical low-pass filter 5 shown in Fig. 11. The optical low-pass filter 5 of this embodiment is formed by adhering the three birefringence plates 51, 52, and 53 which are made of a lithium niobate single crystal. Fig. 12A shows the optical low-pass filter 5 viewed from the optical axis direction of the photographing lens 1, and z3a, z4a, and z5a respectively represent orthogonal projections of the optic axes (Z-axes) of the birefringence plates 51, 52, and 53 onto the entrance or exit surface of the plane-parallel plate.

As shown in Fig. 12A, in this embodiment the orthogonal projection z3a of the Z-axis of the birefringence plate 51 points to a direction that makes an angle ϕ_3 with the long side of the optical low-pass filter 5, the orthogonal projection z4a of the Z-axis of the birefringence plate 52 agrees with (parallel to) the long side direction of the optical low-pass filter 5, and the orthogonal projection z5a of the Z-axis of the birefringence plate 53 points to a direction that

makes an angle ϕ_4 with the long side of the optical low-pass filter 5. In this embodiment, $\phi_3 = +45^\circ$, and $\phi_4 = -45^\circ$.

The size of the optical low-pass filter 5 is
5 determined in consideration of the solid angle of rays coming from the photographing lens 1 and a holder for the optical low-pass filter 5 itself in addition to the dimensions of the effective pixel region of the image sensing element 3. In this embodiment, the optical
10 low-pass filter 5 has a size larger than the effective pixel region of the image sensing element 3. The long side direction of the optical low-pass filter 5 substantially agrees with that of the image sensing element.

15 Fig. 12B shows the optical low-pass filter 5 of this embodiment viewed from a "12B" view direction in Fig. 12A, and Fig. 12C is a partially enlarged view of Fig. 12B. In Figs. 12B and 12C, z_3 represents the Z-axis of the birefringence plate 51, and the Z-axis z_3
20 of the birefringence plate 51 and a normal PL to the entrance/exit surface of the optical low-pass filter 5 make an angle θ_3 , as shown in Fig. 12C.

In this embodiment, $\theta_3 = 45^\circ$. Fig. 12D shows the optical low-pass filter 5 of this embodiment viewed
25 from a "12D" view direction in Fig. 12A, and Fig. 12E is a partially enlarged view of Fig. 12D. In Figs. 12D and 12E, z_4 represents the Z-axis of the birefringence

plate 52, and the Z-axis z_4 of the birefringence plate 52 and the normal PL to the entrance/exit surface of the optical low-pass filter 5 make an angle θ_4 , as shown in Fig. 12E. In this embodiment, $\theta_4 = 65^\circ$.

5 Fig. 12F shows the optical low-pass filter 5 of this embodiment viewed from a "12F" view direction in Fig. 12A, and Fig. 12G is a partially enlarged view of Fig. 12F. In Figs. 12F and 12G, z_5 represents the Z-axis of the birefringence plate 53, and the Z-axis z_5 of the birefringence plate 53 and the normal PL to the entrance/exit surface of the optical low-pass filter 5 make an angle θ_5 , as shown in Fig. 12G. In this embodiment, $\theta_5 = 45^\circ$. Furthermore, thicknesses d_3 , d_4 , and d_5 of the birefringence plates 51, 52, and 53 are
10 respectively $d_3 = 0.19$ mm, $d_4 = 0.19$ mm, and $d_5 = 0.19$ mm, i.e., these birefringence plates are sufficiently thin within a workable range.
15

 In this embodiment, since the birefringence plates 51, 52, and 53 are arranged in this way, extraordinary
20 rays are imaged to be offset from ordinary rays by about $7.2 \mu\text{m}$ in the upper oblique 45° direction with respect to the horizontal direction, about $5.4 \mu\text{m}$ in the horizontal direction (long side direction), and about $7.2 \mu\text{m}$ in the lower oblique 45° direction with
25 respect to the horizontal direction, thus separating an object image into a total of eight images. Fig. 13 shows the separation process of the object image.

Referring to Fig. 13, the first birefringence plate 51 separates an incoming light beam into light beams L1 and L11. The second birefringence plate 52 separates the light beam L1 into light beams L1 and L12, and the light beam L11 into light beams L11 and L112.

The third birefringence plate 53 separates the light beam L1 into light beams L1 and L13, a light beam L2 into light beams L12 and L123, the light beam L11 into light beams L11 and L113, and the light beam L112 into light beams L112 and L1123.

In this way, the single light beam L is separated into eight light beams as a whole.

In a solid-state image sensing element in which square pixels having color filters shown in Fig. 5 are two-dimensionally arranged, it is known that moiré is generated in an object image having a spatial frequency n/p (p is the sampling pitch of pixels, and n is an integer) and a spurious color signal is generated in an object image having a spatial frequency $(2n-1)/2p$ in the line-up directions of pixels, i.e., in the horizontal and vertical directions. Also, since pixels have periodicity in the oblique 45° direction, it is known that a spurious color signal is generated in an object image having a spatial frequency $(2n-1)/\sqrt{2}p$. For this reason, an optical low-pass filter which controls MTF values at least at these spatial

frequencies to be low is required.

In the optical low-pass filter of this embodiment, in order to efficiently reduce a spurious resolution signal and spurious color signal generated based on the color filter matrix shown in Fig. 5 and the sampling pitch p of pixels, the first birefringence plate 51 separates extraordinary rays by substantially $2/\sqrt{p}$ in the upper oblique 45° direction with respect to the horizontal direction, the second birefringence plate 52 separates extraordinary rays by substantially $p/2$ in the horizontal direction, and the third birefringence plate 53 separates extraordinary rays by substantially $2/\sqrt{p}$ in the lower oblique 45° direction with respect to the horizontal direction, thus separating the object image into eight images as a whole, as shown in Fig. 13. Since this embodiment assumes an image sensing element having a pixel pitch = $10\ \mu\text{m}$, the first birefringence plate 51 separates an image in the upper oblique 45° direction with respect to the horizontal direction by around $7.2\ \mu\text{m}$, i.e., a distance nearly half a pixel pitch = $10 \times \sqrt{2}\ \mu\text{m}$ in that direction so as to mainly reduce the spurious color signal, the second birefringence plate 52 rotates the phases of individual point images while separating an image by around $5.2\ \mu\text{m}$, i.e., a distance nearly half the pixel pitch = $10\ \mu\text{m}$, in the horizontal direction, and the third

birefringence plate 53 separates an image in the lower oblique 45° direction with respect to the horizontal direction by around $7.2 \mu\text{m}$, i.e., a distance nearly half a pixel pitch = $10 \times \sqrt{2} \mu\text{m}$ in that direction so as to mainly reduce the spurious color signal.

Using the three birefringence plates 51, 52, and 53, the optical low-pass filter of this embodiment suppresses MTF values of high spatial frequencies equal to or higher than a spatial frequency = $\sqrt{2}/p$ so as to reduce any spurious color signal generated upon photographing an object having high-frequency components, which are determined by the pixel pitch p and are arranged to have an angle of substantially 45° with respect to the horizontal direction of the photographing frame. Note that magenta spurious signals are generated as the spurious color signal in the line-up directions of pixels, i.e., the horizontal and vertical directions at a spatial frequency = $1/p$ determined by the pixel pitch p . However, when the optical low-pass filter is arranged to remove the spurious color signals generated in these directions, the contrast of the high-frequency components inevitably drops, and an adverse influence such as lack of resolving power of a photographed image appears. Hence, in this embodiment, spurious color signals generated in these directions are processed to lower their MTF values alone by adding a low-pass filter

implemented by a signal process using color information and spatial frequency information of a photographed image.

5 Figs. 14A to 14C show the spatial frequency characteristics of the optical low-pass filter of this embodiment. Figs. 14A, 14B, and 14C respectively show the characteristics in the horizontal direction (the long side direction of the image sensing element), the vertical direction (the short side direction of the image sensing element), and the oblique 45° direction.

10 Fig. 15A shows the spectral transmittance characteristics of the overall optical low-pass filter of this embodiment. To achieve such spectral transmittance characteristics, a dielectric thin film coat which has spectral reflectance characteristics shown in Fig. 15B after adhesion is formed as an anti-reflection coat on the interface between each birefringence plate and adhesive in the optical low-pass filter of this embodiment.

20 The anti-reflection coat of this embodiment realizes the characteristics shown in Fig. 15B using two dielectric layers with a small optical film thickness. Alternatively, a normal single-layered film which has an optical film thickness corresponding to 1/4 the center wavelength of ant-reflection can be used as long as the refractive indices of the adhesive and a dielectric thin film material are appropriately

25

selected.

Note that this embodiment assumes a UV setting adhesive having a refractive index of around 1.56.

Fig. 15C shows spectral reflectance characteristics
5 after adhesion at an interface with an adhesive when no anti-reflection coat is formed on that interface.

As shown in Fig. 15C, in the arrangement in which light of around 4% is reflected per adhered surface of the lithium niobate birefringence plate in the visible
10 wavelength range, the optical low-pass filter having four adhered surfaces cannot obtain spectral transmittance characteristics that assure a transmittance of 90% or higher in the visible wavelength range, as shown in Fig. 15A.

As described above, according to this embodiment,
15 since three birefringence plates which are as sufficiently thin as 0.19 mm within a workable range are adhered so that their optic axes point to different directions, and a dielectric thin film is added to each
20 interface including the adhered surface, an optical low-pass filter which has a visible sensitivity correction function while effectively reducing a spurious signal that adversely influences a photographed image, can reduce harmful rays that cause
25 ghost and flare, and is suitably used in a single-lens reflex digital camera that uses exchangeable lenses prepared for a silver halide camera is realized.

(Fourth Embodiment)

Figs. 16A to 16G are schematic views showing principal part of an optical low-pass filter according to the fourth embodiment of the present invention.

5 An optical low-pass filter 5 of this embodiment comprises three birefringence plates 151, 152, and 153 made of a lithium niobate single crystal as in the third embodiment. The optical low-pass filter 5 of this embodiment is inserted in the optical path between
10 the photographing lens 1 and solid-state image sensing element 3 as in the image sensing system shown in Fig. 11 when it is used, and is functionally equivalent to the optical low-pass filter 5 of the third embodiment. Differences from the optical low-pass
15 filter 5 of the third embodiment will be mainly explained below.

Fig. 16A shows the optical low-pass filter 5 viewed from the optical axis direction of the photographing lens 1, and z3a, z4a, and z5a
20 respectively represent orthogonal projections of the optic axes (Z-axes) of the birefringence plates 151, 152, and 153. As shown in Fig. 16A, in this embodiment the orthogonal projection z3a of the Z-axis of the birefringence plate 151 points to a direction that
25 makes an angle ϕ_3 with the long side of the optical low-pass filter 5, the orthogonal projection z4a of the Z-axis of the birefringence plate 152 agrees with

(parallel to) the long side direction of the optical low-pass filter 5, and the orthogonal projection $z5a$ of the Z-axis of the birefringence plate 153 points to a direction that makes an angle $\phi4$ with the long side of the optical low-pass filter 5. In this embodiment, $\phi3 = +45^\circ$, and $\phi4 = -45^\circ$.

The optical low-pass filter 5 in this embodiment has a size larger than the effective pixel region of the image sensing element 3 as in the optical low-pass filter of the third embodiment. Note that the long side direction of the optical low-pass filter 5 substantially agrees with that of the image sensing element.

Fig. 16B shows the optical low-pass filter 5 of this embodiment viewed from a "16B" view direction in Fig. 16A, and Fig. 16C is a partially enlarged view of Fig. 16B. In Figs. 16B and 16C, $z3$ represents the Z-axis of the birefringence plate 151, and the Z-axis $z3$ of the birefringence plate 151 and the normal to the entrance/exit surface of the optical low-pass filter 5 make an angle $\theta3$, as shown in Fig. 16C. Fig. 16D shows the optical low-pass filter 5 of this embodiment viewed from a "16D" view direction in Fig. 16A, and Fig. 16E is a partially enlarged view of Fig. 16D. In Figs. 16D and 16E, $z4$ represents the Z-axis of the birefringence plate 152, and the Z-axis $z4$ of the birefringence plate 152 and the normal to the entrance/exit surface of the

optical low-pass filter 5 make an angle θ_4 , as shown in Fig. 16E. Fig. 16F shows the optical low-pass filter 5 of this embodiment viewed from a "16F" view direction in Fig. 16A, and Fig. 16G is a partially enlarged view of Fig. 16F. In Figs. 16F and 16G, z_5 represents the Z-axis of the birefringence plate 153, and the Z-axis z_5 of the birefringence plate 153 and the normal to the entrance/exit surface of the optical low-pass filter 5 make an angle θ_5 , as shown in Fig. 16G. In this embodiment, $\theta_3 = \theta_4 = \theta_5 = 45^\circ$ to minimize the thicknesses of the individual birefringence plates. In this embodiment, thicknesses d_3 , d_4 , and d_5 of the birefringence plates 151, 152, and 153 are respectively $d_3 = 0.19$ mm, $d_4 = 0.14$ mm, and $d_5 = 0.19$ mm.

In this embodiment, since the birefringence plates 151, 152, and 153 are arranged in this way, extraordinary rays are imaged to be offset from ordinary rays by about $7.2 \mu\text{m}$ in the upper oblique 45° direction with respect to the horizontal direction, about $153 \mu\text{m}$ in the horizontal direction (long side direction), and about $7.2 \mu\text{m}$ in the lower oblique 45° direction with respect to the horizontal direction, thus separating an object image into a total of eight images, as in the third embodiment.

This embodiment is achieved under an assumption that lithium niobate which forms a birefringence plate can be worked to be sufficiently thin. Of course, the

individual birefringence plates may have a larger thickness due to difficulty in thin plate work. For example, if each birefringence plate requires a thickness of 0.25 mm so as to obtain a high-precision thin plate with low-cost work, a similar optical low-pass filter can be realized by setting the angles θ_3 , θ_4 , and θ_5 the Z-axes of the individual birefringence plates respectively make with the normal to the entrance/exit surface of the optical low-pass filter to be substantially $\theta_3 = \theta_5 = 64^\circ$ and $\theta_4 = 72^\circ$, or substantially $\theta_3 = \theta_5 = 24^\circ$ and $\theta_4 = 17^\circ$.

In this manner, the thickness of the birefringence plate can be controlled in correspondence with difficulty in work by appropriately setting the angle of the optic axis of each birefringence plate. In any case, the birefringence plate can be sufficiently thinner than that in the conventional optical low-pass filter that uses quartz or the like. Especially, when an image sensing element having a small pixel pitch is used, and it becomes harder to work birefringence plates, it is effective to set the thickness of each birefringence plate to be slightly large by appropriately setting the angle of the optic axis of the birefringence plate to satisfy conditional formula (1) or (2) of the present invention. Also, in any case, it is effective to achieve anti-reflection in the visible wavelength range by adding a dielectric thin

film onto the surface of each lithium niobate birefringence plate in terms of reductions of ghost and flare, as was explained in the first embodiment of the present invention.

5 In each embodiment of the present invention mentioned above, the separation directions of ordinary and extraordinary rays by the respective birefringence plates are not limited to the aforementioned directions. When the optical low-pass filter has a
10 purpose of reducing a spurious color signal generated in the oblique 45° direction as in each embodiment of the present invention, the orthogonal projection of the Z-axis of the first birefringence plate may be set to point to a direction that makes an angle of $+45^\circ$ with
15 the long side of the optical low pass filter, the orthogonal projection of the Z-axis of the second birefringence plate may be set to point to a direction that makes an angle of $+90^\circ$ with the long side of the optical low pass filter, and the orthogonal projection
20 of the Z-axis of the third birefringence plate may be set to point to a direction that makes an angle of $+135^\circ$ with the long side of the optical low pass filter.

(Other Embodiments)

25 An embodiment which uses the optical low-pass filter in the above embodiment as a projection plate of a solid-state image sensing element will be explained

below using Fig. 8. In Fig. 8, 92 indicates an optical low-pass filter explained in the first or second embodiment, 94 indicates a package, and 95 indicates an image sensing portion. The image sensing element shown in Fig. 8 is of the type in which an image sensing portion 94 comprising a two-dimensional solid-state image sensing element such as a CCD, MOS, or the like is encapsulated in a package 95, which is covered by a transparent plane-parallel plate. In the embodiment shown in Fig. 8, the optical low-pass filter is applied to this transparent plane-parallel plate, and serves as a protection plate.

Normally, inexpensive sheet glass is used as a plane-parallel plate serving as a protection plate. However, the presence of a plane-parallel plate in the optical path is not desirable in terms of both space factor and optical performance of the photographing optical system for the aforementioned reasons. Hence, in the embodiment shown in Fig. 8, an optical low-pass filter which is nearly indispensable in the optical system using the image sensing element is used as a protection plate of the image sensing portion to eliminate plane-parallel plates inserted in the optical path as much as possible.

Fig. 9 shows an embodiment different from Fig. 8, in which the optical low-pass filter in the above embodiment is used as a protection plate of a

solid-state image sensing element. In this embodiment, an image sensing portion is mounted on a board to achieve a low-profile image sensing unit. The image sensing element shown in Fig. 9 has an arrangement in which an image sensing portion 97 and an optical low-pass filter 98 serving as a protection plate are adhered to the two surfaces of a board 96, thus satisfactorily achieving the object of this embodiment, i.e., a low-profile image sensing unit.

In the embodiments of the solid-state image sensing elements shown in Figs. 8 and 9, the optical low-pass filter serving as a protection plate is not in direct contact with the image sensing portion. Alternatively, in order to achieve a further size reduction, the optical low-pass filter may be directly adhered to the image sensing portion.

The aforementioned embodiments have been explained assuming a lithium niobate single crystal as a uniaxial single crystal material used in a birefringence plate of an optical low-pass filter. Alternatively, other uniaxial single crystals, e.g., a single crystal of rutile and the like may be used as long as that uniaxial single crystal has a larger refractive index difference between ordinary and extraordinary rays than quartz.

WHAT IS CLAIMED IS:

1. An optical low-pass filter comprising:

at least one birefringence plate which is made of
a uniaxial single crystal that causes birefringence of
incoming rays and has a refractive index difference of
not less than 0.02 for ordinary and extraordinary rays,
wherein said filter satisfies at least one of:

$$10^{\circ} < \theta < 27^{\circ} \quad \dots(1)$$

$$61^{\circ} < \theta < 80^{\circ} \quad \dots(2)$$

where θ is the angle an optic axis of said at least one
birefringence plate makes with a normal to a surface of
said at least one birefringence plate.

2. A filter according to claim 1, wherein said at
least one birefringence plate is made of lithium
niobate.

3. A filter according to claim 1, further
comprising:

a first birefringence plate made of a uniaxial
single crystal; and

a second birefringence plate made of a uniaxial
single crystal,

wherein an orthogonal projection of an optic axis
of said first birefringence plate onto an entrance or
exit surface and an orthogonal projection of an optic
axis of said second birefringence plate onto the

entrance or exit surface point to different directions.

4. A filter according to claim 3, wherein the orthogonal projection of the optic axis of said first
5 birefringence plate onto the entrance or exit surface and the orthogonal projection of the optic axis of said second birefringence plate onto the entrance or exit surface make substantially 45° .

10 5. A filter according to claim 1, further comprising:

a plurality of plane-parallel plates including said at least one birefringence plate,

wherein when said plurality of plane-parallel
15 plates are adhered via an adhesive, a dielectric thin film having an anti-reflection effect of rays in a visible wavelength range at an interface between the adhesive and said birefringence plate is added to the surface of said birefringence plate.

20

6. An image sensing unit comprising:

an image sensing element; and

an optical low-pass filter of claim 1, which is inserted in an optical path of photographing light
25 guided to said image sensing element, and causes birefringence of the photographing light.

7. A unit according to claim 6, wherein said image sensing element and said optical low-pass filter are integrated.

5 8. A unit according to claim 6, wherein said optical low-pass filter unit is adhered to a front surface of a package that encapsulates said image sensing element.

10 9. A unit according to claim 6, wherein said optical low-pass filter is adhered to a front surface of a board on which said image sensing element is mounted and encapsulates said image sensing element.

15 10. A unit according to claim 6, wherein said optical low-pass filter is directly adhered to said image sensing element.

20 11. A unit according to claim 6, wherein said image sensing element has a rectangular image sensing surface, and

 an orthogonal projection of an optic axis of one of said at least one birefringence plate onto an entrance or exit surface is substantially parallel to a
25 long side of the image sensing surface.

12. A unit according to claim 6, wherein said

optical low-pass filter comprises:

a first birefringence plate made of a uniaxial single crystal; and

a second birefringence plate made of a uniaxial
5 single crystal,

wherein an orthogonal projection of an optic axis of said first birefringence plate onto an entrance or exit surface of the birefringence plate and an orthogonal projection of an optic axis of said second
10 birefringence plate onto the entrance or exit surface of the birefringence plate make substantially 45° .

13. A unit according to claim 12, wherein said image sensing element has a rectangular image sensing
15 surface, and

the orthogonal projection of the optic axis of said first birefringence plate onto the entrance or exit surface of the birefringence plate is substantially parallel to a long side of the image
20 sensing surface, and the orthogonal projection of the optic axis of said second birefringence plate onto the entrance or exit surface of the birefringence plate makes substantially 45° with the long side of the image sensing surface.

25

14. An image sensing apparatus comprising:
an image sensing unit of claim 6; and

an image sensing optical system for guiding
photographing light to said image sensing unit.

15 15. An apparatus according to claim 14, further
comprising a detachable mount.

16. An image sensing unit comprising:

an image sensing element having a rectangular
image sensing surface; and

10 at least one birefringence plate which is inserted
in an optical path of photographing light guided to
said image sensing element, is made of a uniaxial
single crystal that causes birefringence of incoming
rays, and has a refractive index difference of not less
15 than 0.02 for ordinary and extraordinary rays,
wherein said unit satisfies:

$$0.015 < p/d < 0.045 \qquad \dots(3)$$

where d is the thickness of said at least one
birefringence plate, and p is the pixel pitch of the
20 image sensing surface in a long side direction.

17. A unit according to claim 16, wherein said
unit satisfies one of:

$$10^\circ < \theta < 27^\circ \qquad \dots(1)$$

25 $61^\circ < \theta < 80^\circ \qquad \dots(2)$

where θ is the angle an optic axis of the uniaxial
single crystal of said at least one birefringence plate

makes with a normal to a surface of said at least one birefringence plate.

18. A unit according to claim 16, further
5 comprising:

a first birefringence plate made of a uniaxial single crystal; and

a second birefringence plate made of a uniaxial single crystal,

10 wherein an orthogonal projection of an optic axis of said first birefringence plate onto an entrance or exit surface and an orthogonal projection of an optic axis of said second birefringence plate onto the entrance or exit surface make substantially 45°.

15
19. A unit according to claim 18, wherein the orthogonal projection of the optic axis of said first birefringence plate onto the entrance or exit surface is substantially parallel to a long side of the image
20 sensing surface, and the orthogonal projection of the optic axis of said second birefringence plate onto the entrance or exit surface makes substantially 45° with the long side direction of the image sensing surface.

25 20. A unit according to claim 16, wherein the uniaxial single crystal of said birefringence plate is a single crystal of lithium niobate.

21. An image sensing apparatus comprising:
an image sensing unit of claim 16; and
an image sensing optical system for guiding
photographing light from an object to said image
5 sensing unit.

22. An optical low-pass filter comprising:
a first birefringence plate made of a single
crystal of lithium niobate; and
10 a second birefringence plate made of a single
crystal of lithium niobate,
wherein an orthogonal projection of an optic axis
of said first birefringence plate onto an entrance or
exit surface and an orthogonal projection of an optic
15 axis of said second birefringence plate onto the
entrance or exit surface point to different directions,
and all the birefringence plates of said optical
low-pass filter are made of a single crystal of lithium
niobate.

23. A filter according to claim 22, wherein the
orthogonal projection of the optic axis of said first
birefringence plate onto the entrance or exit surface
and the orthogonal projection of the optic axis of said
25 second birefringence plate onto the entrance or exit
surface make substantially 45° .

24. A filter according to claim 22, wherein when said first and second birefringence plates are adhered, a dielectric thin film having an anti-reflection effect of rays in a visible wavelength range at an interface
5 between the adhesive and each birefringence plate is added to a surface of the birefringence plate.

25. A filter according to claim 22, wherein said filter satisfies one of:
10 $10^\circ < \theta_0 < 27^\circ$
 $61^\circ < \theta_0 < 80^\circ$
where θ_0 is the angle an optic axis of at least one of said first and second birefringence plates makes with a normal to an entrance or exit surface of the
15 birefringence plate.

26. A filter according to claim 22, further comprising:
a third birefringence plate made of a single
20 crystal of lithium niobate,
wherein the orthogonal projection of the optic axis of said first birefringence plate onto the entrance or exit surface and the orthogonal projection of the optic axis of said second birefringence plate
25 onto the entrance or exit surface make substantially 45° , and the orthogonal projection of the optic axis of said first birefringence plate onto the entrance or

exit surface and an orthogonal projection of an optic axis of said third birefringence plate onto the entrance or exit surface make substantially 90°.

- 5 27. A filter according to claim 26, wherein said first, second, and third birefringence plates are arranged in turn from a light entrance side, and said filter satisfies:

$$D1 = D3 > D2$$

- 10 where D1, D2, and D3 are respectively the separation distances of said first, second, and third birefringence plates at exit surfaces thereof.

- 15 28. A filter according to claim 27, wherein said filter satisfies one of:

$$10^\circ < \theta_2 < 27^\circ$$

$$61^\circ < \theta_2 < 80^\circ$$

- 20 where θ_2 is the angle the optic axis of said second birefringence plate makes with a normal to an entrance or exit surface of a plane-parallel plate.

29. An image sensing unit comprising:
an image sensing element; and
an optical low-pass filter of claim 22, which is
25 inserted in an optical path of photographing light guided to said image sensing element, and causes birefringence of the photographing light.

30. A unit according to claim 29, wherein said image sensing element has a rectangular image sensing surface, and

an orthogonal projection of an optic axis of one
5 of the plurality of birefringence plates onto an entrance or exit surface is substantially parallel to a long side of the image sensing surface.

31. A unit according to claim 29, wherein an
10 orthogonal projection of an optic axis of said first birefringence plate onto an entrance or exit surface and an orthogonal projection of an optic axis of said second birefringence plate onto the entrance or exit surface make substantially 45° .

15

32. A unit according to claim 31, wherein said image sensing element has a rectangular image sensing surface, and

an optic axis of one of said first and second
20 birefringence plates is substantially parallel to a long side of the image sensing surface.

33. A unit according to claim 32, further comprising:

25 a first birefringence plate in which an orthogonal projection of an optic axis of a single crystal makes an angle of substantially 45° with a long side

direction of the image sensing surface; and

a third birefringence plate made of a single crystal of lithium niobate,

wherein the orthogonal projection of the optic
5 axis of said first birefringence plate onto the entrance or exit surface and the orthogonal projection of the optic axis of said second birefringence plate onto the entrance or exit surface make substantially 45°, and the orthogonal projection of the optic axis of
10 said first birefringence plate onto the entrance or exit surface and an orthogonal projection of an optic axis of said third birefringence plate onto the entrance or exit surface make substantially 90°.

15 34. A unit according to claim 33, wherein said unit satisfies:

$$D1 \approx D3 > D2$$

where D1, D2, and D3 are respectively the separation
distances of the first, second, and third birefringence
20 plates at exit surfaces thereof.

35. A unit according to claim 34, wherein said first, second, and third birefringence plates are arranged in turn from a light entrance side, and said
25 unit satisfies one of:

$$10^\circ < \theta_2 < 27^\circ$$

$$61^\circ < \theta_2 < 80^\circ$$

where θ_2 is the angle the optic axis of said second birefringence plate makes with a normal to an entrance or exit surface of a plane-parallel plate.

5 36. A unit according to claim 29, wherein at least one birefringence plate satisfies one of:

$$10^\circ < \theta_0 < 27^\circ$$

$$61^\circ < \theta_0 < 80^\circ$$

10 where θ_0 is the angle an optic axis of one of the plurality of birefringence plates made of a lithium niobate single crystal makes with a normal to an entrance or exit surface of a plane-parallel plate.

15 37. A unit according to claim 29, wherein said image sensing element and said optical low-pass filter are integrated.

20 38. A unit according to claim 29, wherein said optical low-pass filter unit are adhered to a front surface of a package that encapsulates said image sensing element.

25 39. A unit according to claim 29, wherein said optical low-pass filter is adhered to a front surface of a board on which said image sensing element is mounted and encapsulates said image sensing element.

40. A unit according to claim 29, wherein said optical low-pass filter is directly adhered to said image sensing element.

- 5 41. An image sensing apparatus comprising:
 an image sensing unit of claim 29; and
 an image sensing optical system for guiding
photographing light from an object to said image
sensing unit.

001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053
054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195

ABSTRACT OF THE DISCLOSURE

If the thickness of a birefringence plate that forms an optical low-pass filter is not appropriately set, problems in terms of optical characteristics or machine works are posed. Hence, there is provided an optical low-pass filter which has at least one birefringence plate which is made of a uniaxial single crystal that causes birefringence of incoming rays, has a refractive index difference of 0.02 or more for ordinary and extraordinary rays, and satisfies one of:

$10^{\circ} < \theta < 30^{\circ}$...(1)

$60^{\circ} < \theta < 80^{\circ}$...(2)

where θ is the angle the optic axis of the birefringence plate makes with the normal to the surface of the birefringence plate.

FIG. 1

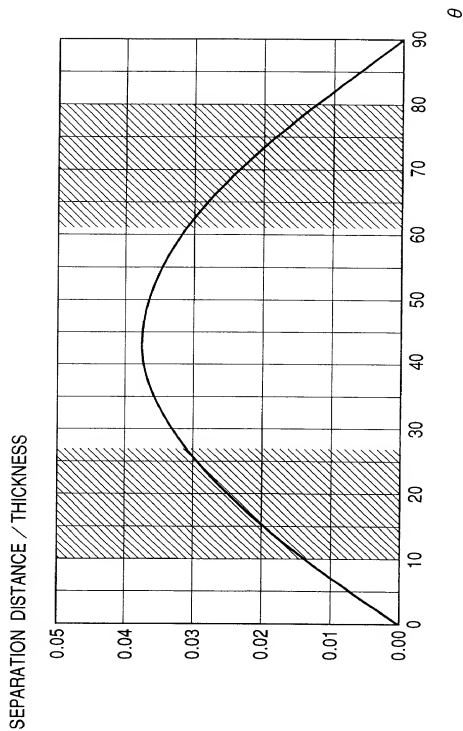


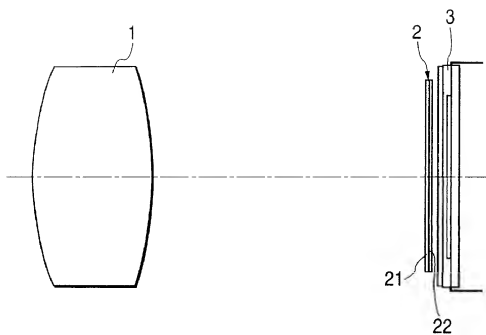
FIG. 2

FIG. 3A




FIG. 3D




FIG. 3B




FIG. 3E




FIG. 3C




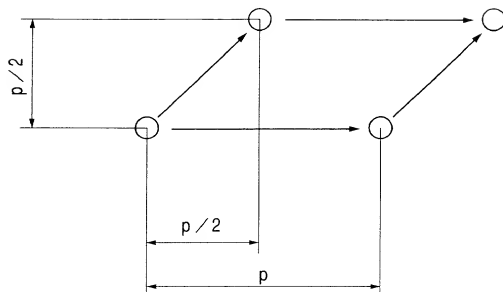
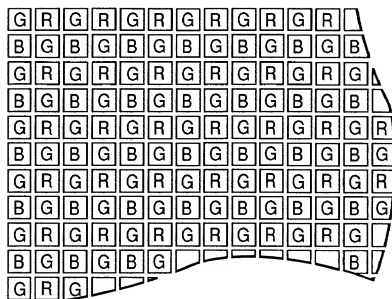
FIG. 4*FIG. 5*

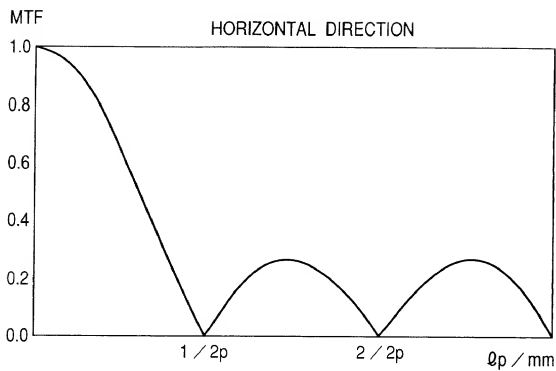
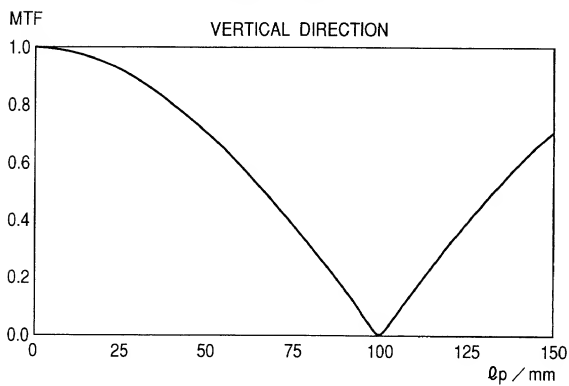
FIG. 6A**FIG. 6B**






FIG. 7A**FIG. 7D****FIG. 7B****FIG. 7E****FIG. 7C**

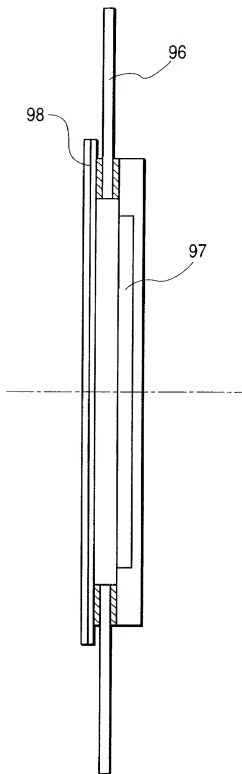
FIG. 9

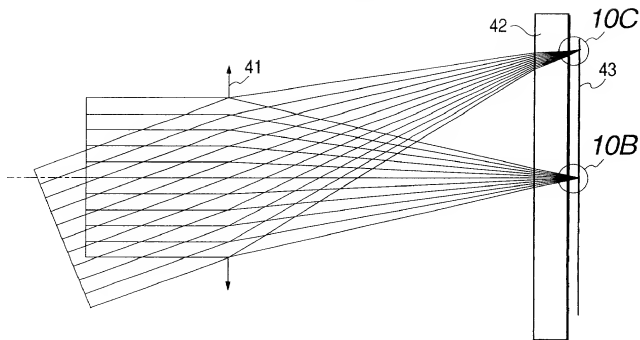


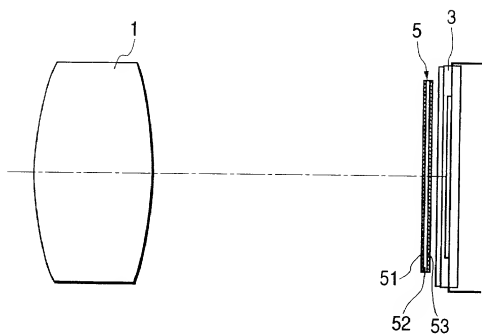
FIG. 10A**FIG. 10B****FIG. 10C**

FIG. 11

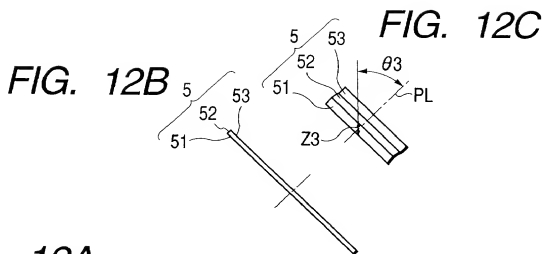



**FIG. 12A****FIG. 12D****FIG. 12E****FIG. 12F**

FIG. 13

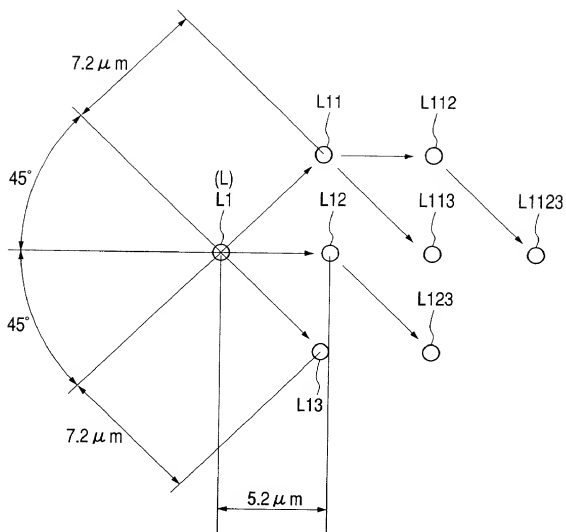


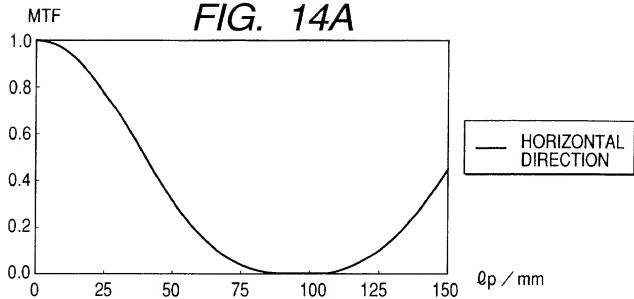
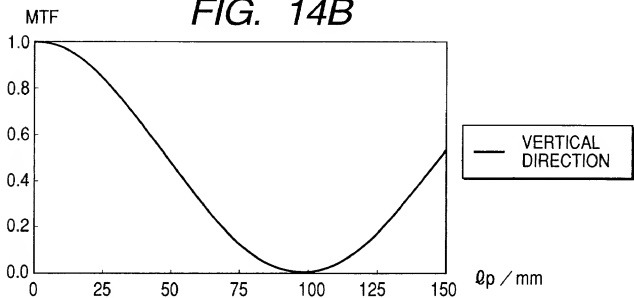
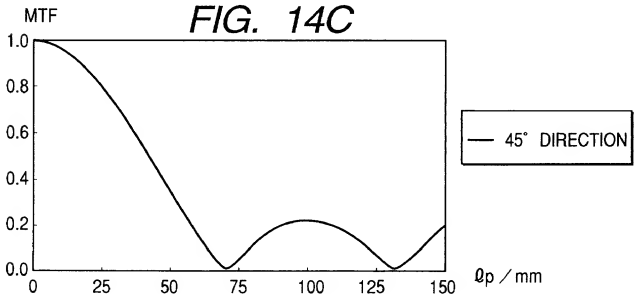
FIG. 14A**FIG. 14B****FIG. 14C**

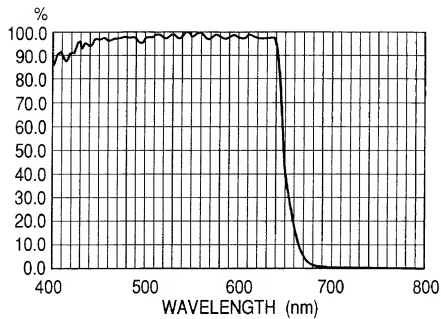
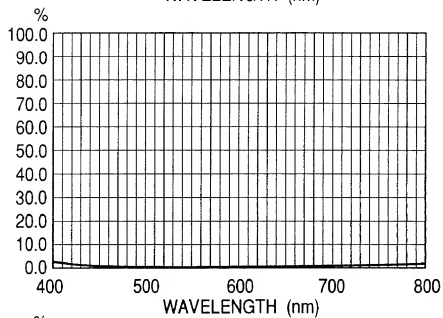
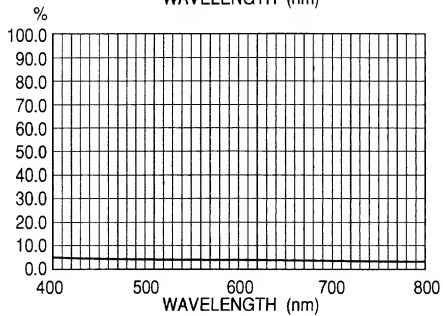
FIG. 15A**FIG. 15B****FIG. 15C**

FIG. 16C

FIG. 16B




FIG. 16A




FIG. 16D



FIG. 16E




FIG. 16F




FIG. 16G